

# Sultrade Horizontal peeler Centrifuge SCH


Material of centrifuge can be:

- stainless steel 1.4404 , 1.4571 or else
- special alloy 2.4602 (Hastelloy C-22)
- coating with Hallar (E-CTFE) or else

Cleaning of centrifuge can be made with

- CIP ball nozzles for cascade cleaning
- oriented nozzles for direct washing
- flooding of centrifuge with cleaning liquid

Variable design of centrifuge and its accessories can be made according the customers need

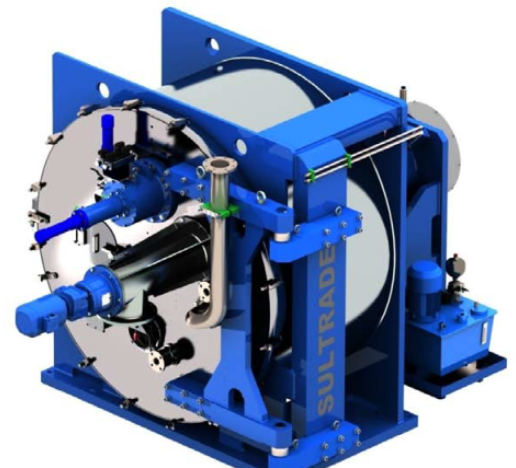

<u>Centrifuge type</u>		<b>SCH 400/180</b>	<b>SCH 1000/500</b>	<b>SCH 1300/750</b>	<b>SCH 2000/1000</b>
<u>Diameter of basket</u>	mm	400	1000	1300	2000
<u>Height of basket</u>	mm	180	500	750	1000
<u>Opening diameter of basket</u>	mm	300	750	1000	1550
<u>Filter surface</u>	m <sup>2</sup>	0,226	1,571	3,063	6,283
<u>Useful volume</u>	m <sup>3</sup>	0,01	0,172	0,435	1,255
<u>Max. load</u>	kg	17,5	215	545	2200(1100)
<u>Max. revolution</u>	<u>rpm</u>	3000		1200	660 (825)
<u>Centrifugal acceleration</u>	x g	2012	1257	1046	487 (761)
<u>Drive power</u>	kW	4	37	55	110
<u>Weight without load</u>	kg	500	5000	9000	22000

# Sultrade Horizontal peeler Centrifuge SCH

